


ANCHOR WRAPS / DRUM CAPACITY / TWO PART LINE ENGINEERING INFORMATION

Engineering Information

Anchor Wraps

The first 3 to 4 wraps of wire rope must remain on the drum at all times to act as anchor wraps and help secure the wire rope to the drum. The length of wire rope used for anchor wraps must be added to the total travel distance to determine the length of the wire rope needed for the application.

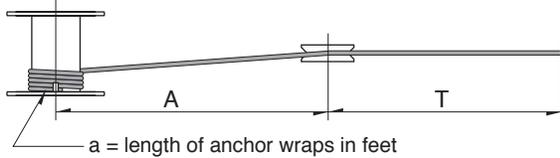


- a = length of anchor wraps in feet
- a = $((D + d) \times \pi \times N) \div 12$
- D = diameter of drum in inches
- d = diameter of wire rope in inches
- π = 3.14
- N = number of anchor wraps (3 to 4), or if entire first layer N = $((\text{drum width}) \div d)$

- L = Total Length of Wire Rope = T + A + a
- T = maximum distance load will travel
- A = distance between drum and lead sheave, to maintain fleet angle.
- a = length of anchor wraps in feet

Drum Capacity

Full drum capacity is typically calculated using the formula shown below. This formula is based on the practices of wire rope manufacturers and assumes uniform winding of the wire rope. In actual practice, drum capacities may be 25-30% less than the values given by this formula due to uneven spacing, loose winding, and overlapping.

Drum capacity often determines the winch you select. Most power winches can be equipped with different sizes of wire rope. Larger diameter wire ropes will decrease drum capacity, smaller diameter wire ropes will increase drum capacity.




- drum capacity in feet = $(A + D) \times A \times B \times K$
- K = factor from the table
- A = $(H - D - 2Y) \div 2$
- Y = clear distance between edge of flange and wire rope (usually 1/2").

wire rope dia. (in)	1/8	3/16	7/32	1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4	7/8	1	1-1/8	1-1/4	1-3/8
K factor	13.6	6.14	4.59	3.29	2.21	1.58	1.19	.925	.741	.607	.428	.308	.239	.191	.152	.127

Two Part Line

In some applications a two part line can be used to effectively increase the size of load the winch can move. A two part line reduces tension in the wire rope, it does not change the weight of the load. All equipment supporting the load, such as sheave blocks, must be rated for the full size of the load.

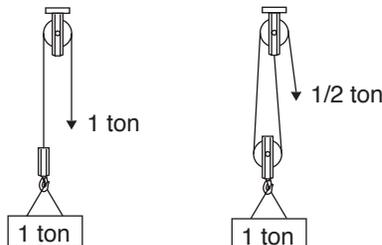

As the number of rigging lines increase, line pull and line speed decrease. Friction in the system also affects performance. As the number of rigging lines increase, friction also increases. Contact a reputable sheave supplier for more information.

Engineering Information Continued...



Formulas

$$H = \frac{P \times \text{fpm}}{33000 \times E}$$

$$P = \frac{HP \times 33000 \times E}{\text{fpm}}$$


$$\text{fpm} = 0.262 \times \text{rpm} \times D$$

$$\text{rpm} = \frac{3.82 \times \text{fpm}}{D}$$

hp = horsepower
 P = line pull
 E = efficiency of gears
 fpm = line speed in feet per minute
 rpm = drum speed in revolutions per minute
 D = diameter of drum in inches at point of line entrance

Fleet Angle

Fleet angle is the angle between the wire rope and an imaginary line extending perpendicular to the drum. The fleet angle varies with the distance between the lead sheave and the drum. The proper fleet angle helps the wire rope to wind evenly onto the drum, and helps to reduce wear to the wire rope, drum, and lead sheave. Too large a fleet angle will cause the wire rope to wind loosely, overlap and possibly jump the flange and cause severe damage to the equipment. A maximum fleet angle of 1-1/2° for smooth drums, and 2° for grooved drums, helps the wire rope wind uniformly.

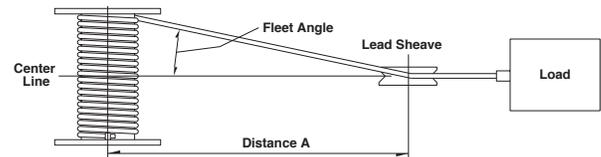

distance A in ft = for 1.5° fleet angle = (drum width in inches) x 1.59
 = for 2° fleet angle = (drum width in inches) x 1.19

Recommended Max. Fleet Angle

smooth drum 1.5° grooved drum 2°